


Problem: 7-24

Given: Steam entering an adiabatic diffuser at 400 m/s as a saturated vapor at 0.4 MPa.

Find: Maximum possible discharge pressure.

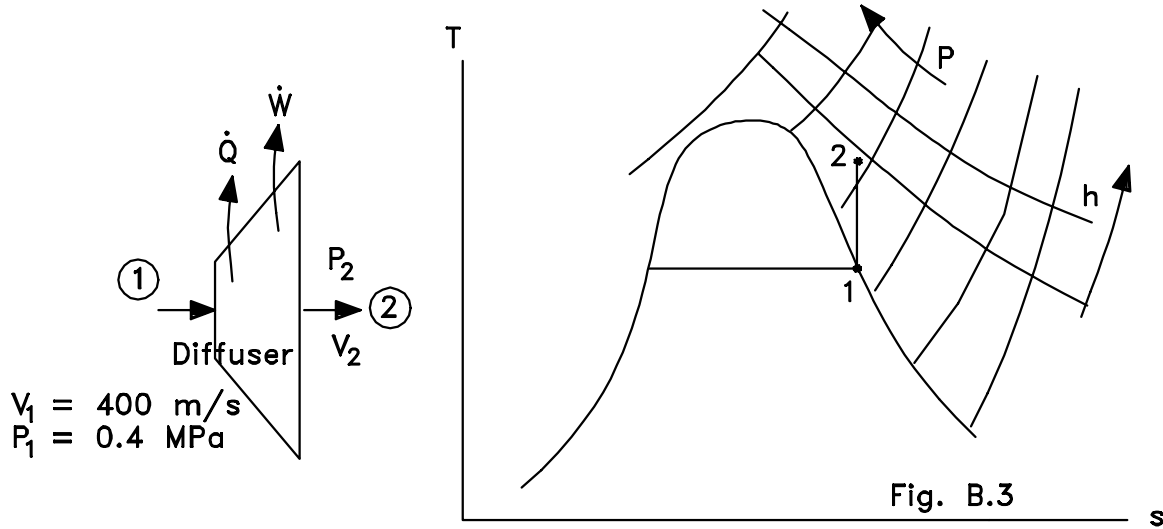

From the $T-s$ plot, we see that in the superheat region (which is where state 2 will be), as s increases, P decreases. Thus for the maximum discharge pressure we want the minimum entropy.

But from the second law

$$P_s \geq 0 \quad \Rightarrow \quad s_2 \geq s_1$$

Therefore for maximum P_2 ,

$$s_2 = s_1$$

Following a line of constant entropy, we see that as h increases, P increases. Therefore we want h_2 to be as high as possible. A first law energy balance gives:

$$\dot{m}(h_1 + \frac{1}{2}V_1^2 + p e_1) = \dot{m}(h_2 + \frac{1}{2}V_2^2 + p e_2) + \dot{Q}^0 + \dot{W}^0$$

For maximum h_2 , $V_2 = 0$.

Then

$$h_2 = h_1 + \frac{1}{2}V_1^2$$

From Tables:

$$\begin{aligned}h_1 &= 2738.5 \text{ kJ/kg} \\s_1 = s_2 &= 6.8967 \text{ kJ/kg} \cdot K\end{aligned}$$

$$\begin{aligned}h_2 = h_1 + \frac{1}{2}V_1^2 &= 2738.5 \text{ kJ/kg} + \frac{1}{2} \left(\frac{400 \text{ m/s}}{10^3} \right)^2 \\&= 2918.5 \text{ kJ/kg}\end{aligned}$$

Therefore state 2 is defined by:

$$\begin{aligned}h_2 &= 2818.5 \text{ kJ/kg} \\s_2 &= 6.8967 \text{ kJ/kg} \cdot K\end{aligned}$$

Interpolating Table B.16:

$$\boxed{P_{2max} = 0.601 \text{ MPa}} \quad \Leftarrow$$